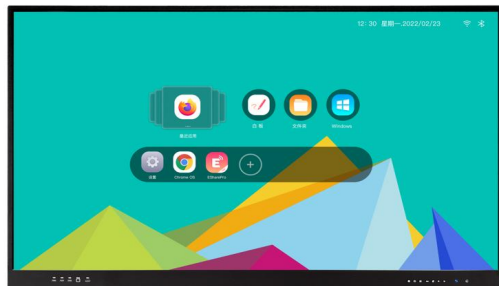


LT S982EA Interactive Flat Panel Display

Model
LT75S982EA
Product picture


Display specification

| | |
|------------------------------|----------------------------|
| Diagonal display size | 75" |
| Active area (mm) | 1649.66 * 927.93(V) |
| Pixel Pitch | 0.429 mm x 0.429 mm |
| Bezel color | Aluminum frame Black color |
| Back Light | Direct type LED (D-LED) |
| Resolution | 4K UHD 3840*2160 /60hz |
| Aspect Ratio | 16:09 |
| Contrast Ratio | 5000:1 |
| Colors | 1.07 billion colors |
| MBTF Lifespan | ≧ 50,000 hours |
| Brightness | ≧ 350cd/cm2 |
| Viewing angle | 178° |
| Glass hardness | Mohs-7 level |
| Screen surface | Anti-Glare glass |

Panel Interactivity

| | |
|----------------------------|--|
| Touch technology | IR touch |
| Multi touch | 20 points(20 points in Android & 40 points in Windows) |
| Auto-calibrate | Yes |
| Anti-light | Yes |
| Minimum object size | 3mm |
| Accuracy | 1 mm (over 90% Area) |
| Response Time | <8 ms |
| System support | HID Support & Win10 / Win8 / Win7 / Mac OS / Android / Chrome OS / Linux |
| Web Browser | YES |
| Application Library | YES |

Front side Connectivity

| | |
|-----------------------|--|
| USB | 3 |
| TOUCH USB | 1 |
| HDMI 2.0 INPUT | 1 |
| Front keys | Power on/off; Signal source; Return; Main page; Menu; Volume down; Volume up |
| Speaker | 15W*2 |

Rear/Bottom side Connectivity

| | |
|------------------|---|
| TOUCH USB | 1 |
| RJ45 IN | 1 |
| AV IN | 1 |
| AV OUT | 1 |

| | |
|-----------------------------------|---|
| EARPHONE OUTPUT | 1 |
| COAX OUT | 1 |
| HDMI 2.0 INPUT | 2 |
| RS232 | 1 |
| USB 3.0 | 1 |
| USB 2.0 | 1 |
| Blue tooth | 1 |
| WI-FI | 1*2.4G, 1*5G |
| Windows OPS Slot | OPS & OPS-C Intel standard |
| VGA INPUT | 1 |
| PC AUDIO INPUT | 1 |
| Operating system | |
| Android Version | Android 11.0 |
| CHIP | Amlogic T982 |
| CPU | A55*4 @1.9GHz |
| RAM | 4GB DDR4 (8GB option) |
| ROM | 32GB (64GB option) |
| GPU | G52 MP2 |
| Decoding resolution | Support 4K H.265 decoding |
| Video format | Support VP9、HEVC/H.265、MPEG1/2、MPEG4、Sorensen H.263、H263、H.264、AVS、AVS+、AVS2、WMV3、VC1、Motion JPEG、VP8、RV30/RV40、AV1 and other video formats |
| Image Format | Support JPG/JPEG/BMP/PNG and other image formats |
| audio format | Support MPEG1/2、AC3、EAC3(DDP)、AAC、HEAAC、WMA、WMA10 pro M0、WMA10 pro M1、WMA10 pro M2、VORBIS、LPCM、IMA-ADPCM、MS-ADPCM、LBR、FLAC、DRA、OPUS、AC4、MPEG-H TV and other audio formats |
| Physical specifications | |
| Net Weight (kg±2) | 51 |
| Gross Weight (kg±2) | 63 |
| Overall size(mm) | 1692.1 *97.5*1021.9 |
| Carton size(mm) | 1842 * 222 * 1166 |
| VESA | 600*400 |
| Electrical | |
| Input Voltage | 100-240V AC |
| Switch on or off | Yes |
| Power Consumption(Standby) | <0.5W |
| Power Consumption | Maximun< 420W Eco<75W |
| Accessories | |
| Accessories | WIFI antenna; No ink pen * 2pcs, Remote control *1pcs, 1.5m power cord *1pcs, 1.5m HDMI cable *1pcs, 1.5m USB touch cable *1pcs; wall mount kit |